




Product Data Sheet

ATS608

8-way input expander, plug-in, Advisor Advanced

8-way plug-in input expander

The ATS608 offers a 8-way input expansion to Advisor Advanced panels. To reduce required space in the Main control panel housing, the unit is a plug-in to the Main Control panel PCB. The ATS608 provides for 8 additional inputs available through screw terminals. Inputs are assigned to zones through configuration in the control panel. The zone type is defined through the zone menu in the main control panel.

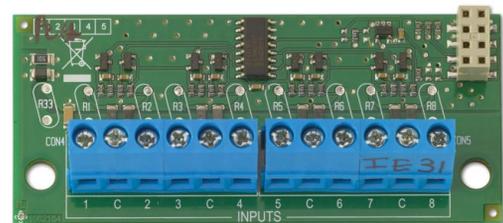

Standard Features

- 8 inputs
- Plug-in to Advisor Advanced panels
- Supports shock sensors

ATS608

8-way input expander, plug-in, Advisor Advanced

Specifications

Power supply	10.5 - 13.8 VDC (from control panel)
Current consumption	10 mA
End-of-line resistor	Configurable through control panel
Operating temperature	0 to +50°C
Humidity	95% non-condensing
Dimensions (w x h x d)	40 x 80 x 18 mm

Ordering Information

Part No.	Description
ATS608	8-way input expander, plug-in, Advisor Advanced
ATS1000A-SM	Advisor Advanced ATS1000A control panel in small metal housing, EN grade 2, 8 - 32 zones, 4 areas, 1A PSU, multi-lingual. Wired or wireless (hybrid) using plug-in or remote DGP's. Max 8 keypads/readers and 7 DGP's. Different housings available
ATS1000A-MM	Advisor Advanced ATS1000A control panel in medium metal housing, EN grade 2, 8 - 32 zones, 4 areas, 1A PSU, multilingual. Wired or wireless (hybrid) using plug-in or remote DGP's. Max 8 keypads/readers and 7 DGP's. Different housings available
ATS2000A-MM	Advisor Advanced ATS2000A control panel in medium metal housing, EN grade 2, 8 - 64 zones, 8 areas, 2A PSU, multilingual. Wired or wireless (hybrid) using plug-in or remote DGP's. Max 8 keypads/readers and 7 DGP's. Different housings available
ATS626	16-way output expander, plug-in, Advisor Advanced

