



2/A76LB



Type :	ENERGIZER ALKALINE 1,5V LR44/A76 BL2
Ref :	2/A76LB
EAN :	7638900083071
Marque :	Energizer
Emballage :	10
Boîte d'emballage :	10
Poids UC (gr) :	9
Capacité (mAh) :	150
Volt :	1.5

Description détaillée :

C'est la pile bouton alcaline la plus utilisée de sa famille, on la retrouve dans de nombreuses montres, calculatrices, lampes torches, ainsi que dans des appareils médicaux.




ENERGIZER A76

MINIATURE ALKALINE



Industry Standard Dimensions

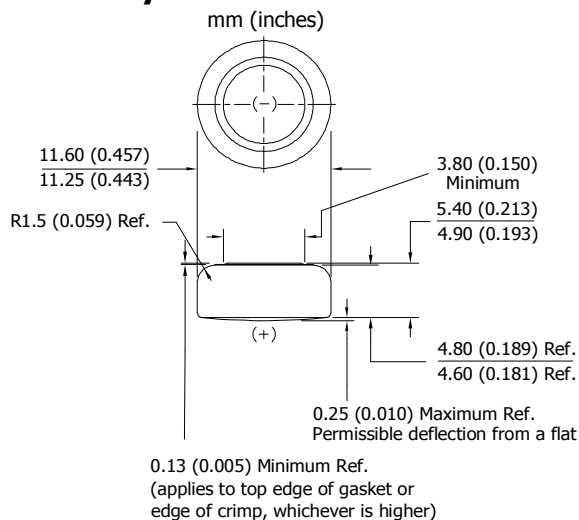


DESIGNED FOR ELECTRONIC APPLICATIONS
WHICH MAY REQUIRE HIGH RATE PULSES

Specifications

Chemical System:	Manganese Dioxide (MnO_2)
Designation:	ANSI/NEDA 1166A, IEC-LR44
Nominal Voltage:	1.5 Volts
Typical Capacity:	150 mAh* (to 0.9 volts)
Capacity Test:	7.5K ohm continuous drain at 21°C (70°F)
Typical Weight:	2.4 grams (0.08 oz.)
Typical Volume:	0.54 cubic centimeters (0.03 cubic inch)
Impedance (40 Hz):	3 to 9 ohms
Max Bulge:	This battery will bulge as it is discharged, but will not exceed the maximum height shown on the battery drawing.

* Varies according to the applied load, temperature, and cutoff voltage.


Cross Section

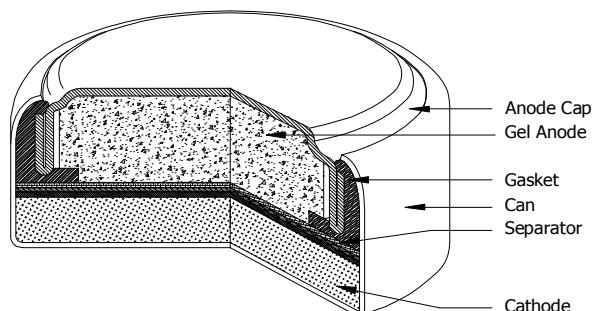

Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

Load: 7.5K ohms - Continuous
Typical Drain @ 1.25V: 0.17 mA
Hours to 0.9V: 900

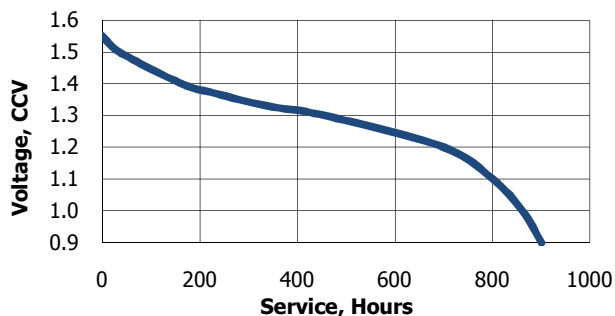

Depth of Discharge

Typical Performance at 21°C (70°F)

Load: 7.5K ohms - Continuous
Typical Drain @ 1.25V: 0.17 mA
Hours to 0.9V: 900

(as percent of capacity)

Temperature	0%	40%	80%
21°C (70°F)	1.55V	1.33V	1.20V

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.